


DOUBLE ACCES WORK PLATFORM

Fixed aluminum platforms for anchoring to the ground.

Mostly used to overcome obstacles and conveyor lines.

REGULATIONS IN 14,122

- ✓ Approximate maximum working height (mts): 5
- ✓ Extruded profiles.
- ✓ It is fixed.
- ✓ Second railing optional.

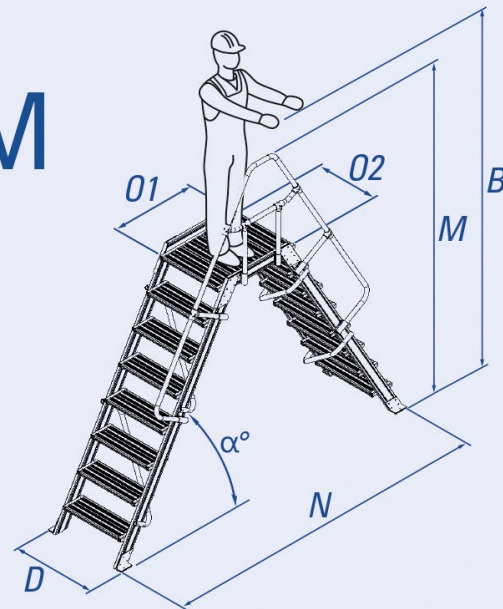

Double Work Platform 60°

Model	Rungs	Weight	Width (D1/D2)	Opening (N)	Platform Height (H)	Working Height (B)	Total Height (M)	Platform (O1/O2)
1030003	3	21	0,65	1,53	0,71	2,21	1,71	0,60x0,60
1030004	4	25	0,65	1,82	0,96	2,46	1,96	0,60x0,60
1030005	5	30	0,65	2,10	1,29	2,71	2,21	0,60x0,60
1030006	6	33	0,65	2,39	1,46	2,96	2,46	0,60x0,60
1030007	7	39	0,65	2,68	1,71	3,21	2,71	0,60x0,60
1030008	8	42	0,65	2,97	1,96	3,46	2,96	0,60x0,60
1030010	10	52	0,65	3,55	2,46	3,96	3,46	0,60x0,60
1030012	12	60	0,65	4,13	2,96	4,46	3,96	0,60x0,60

SIZES EXPRESSED IN METERS

STANDARD SIZES (mm) / Double Work Platform 60° Step depth: 200 Separation between steps: 250

Double Work Platform 45°

Model	Rungs	Weight	Width (D1/D2)	Opening (N)	Platform Height (H)	Working Height (B)	Total Height (M)	Platform (O1/O2)
1030503	3	21	0,65	1,532	0,71	2,21	1,71	0,60x0,60
1030504	4	36	0,65	2,295	0,78	2,28	1,78	0,60x0,60
1030505	5	41	0,65	2,705	0,99	2,49	1,99	0,60x0,60
1030506	6	56	0,65	3,115	1,19	2,69	2,11	0,60x0,60
1030507	7	57	0,65	3,525	1,40	2,90	2,40	0,60x0,60
1030508	8	64	0,65	3,935	1,60	3,10	2,60	0,60x0,60
1030510	10	77	0,65	4,755	2,01	3,51	3,01	0,60x0,60
1030512	12	92	0,65	5,575	2,42	3,92	3,42	0,60x0,60

SIZES EXPRESSED IN METERS

STANDARD SIZES (mm) / Double Work Platform 45° Step depth: 200 Separation between steps: 205