


8373

Mobile tower with stabiliser

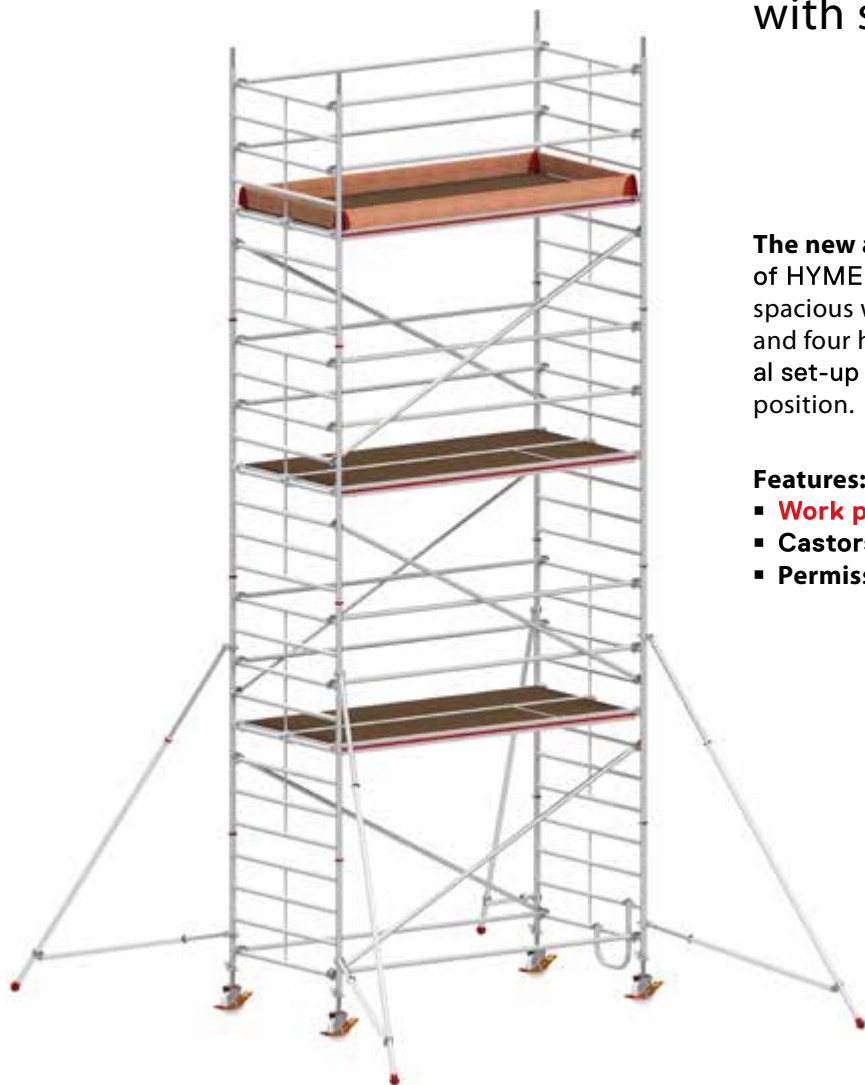

The new all-rounder: Combines all the advantages of HYMER mobile towers with stabilisers. With a large, spacious work surface thanks to two adjacent platforms and four height-adjustable swivel castors. Also: optional set-up with height offset, for example in stairwell position.

Features:

- **Work platform: 2.95 × 1.30 m**
- **Castors: Ø 200 mm**
- **Permissible load: 150 kg/m² (1.5 kN/m²)**

												
Reach height (approx. m)	3.40	4.40	5.40	6.40	7.40	8.40	9.40	10.40	11.40	12.40	13.40	
Tower height (approx. m)	2.64	3.64	4.64	5.64	6.64	7.64	8.64	9.64	10.64	11.64	12.64	
Standing height (approx. m)	1.40	2.40	3.40	4.40	5.40	6.40	7.40	8.40	9.40	10.40	11.40	
Platform length (approx. m)	2.95	2.95	2.95	2.95	2.95	2.95	2.95	2.95	2.95	2.95	2.95	
Frame section width (approx. m)	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	
Ballasting												
Indoor, centre (kg)	0	0	0	0	0	0	0	0	0	0	0	0
Indoor, on wall (kg)	0	0	0	0	20 ⁽¹⁾	20 ⁽¹⁾	20 ⁽¹⁾	30 ⁽¹⁾	40 ⁽¹⁾	50 ⁽¹⁾	60 ⁽¹⁾	
Outdoor, centre (kg)	0	40	0	0	0	0	0	not permitted	not permitted	not permitted	not permitted	
Outdoor, on the wall (kg)	0	40	30 ⁽¹⁾	0 ⁽²⁾	0 ⁽²⁾	0 ⁽²⁾	0 ⁽²⁾	not permitted	not permitted	not permitted	not permitted	
Order no.	837303	837304	837305	837306	837307	837308	837309	837310	837311	837312	837313	

⁽¹⁾ Ballasting is not required when using two wall connectors (607141) for pressure support.

⁽²⁾ Two wall connectors (607141) need to be used for pressure support.

Required additional parts from page 23.

Individual parts and parts list can be found in the instructions for assembly and use on page 67. | [Click here.](#)